

specification for GBH glass shaft door **RSZ-S1**, door drive underneath

mailto: christian.gratzl@gbh-design.de

Company		Door width (mm)	
Name		Door height (mm)	
Phone		Cabine door (piece)	
Fax		Shaft door (piece)	
e-Mail			
Key word			

General remarks

GBH Design GmbH
 Aufzugskomponenten
 Am Branden 2
 D-85256 Vierkirchen
 Christian Gratzl
 Telefon: +49 8139 9321 316
 Telefax: +49 8139 9321 301



technical description

shaft door:

DW 800 - 1400mm, DH 2000 - 3000mm

mechanism underneath

full glass door, VSG16 (bracket below)

door lock: hook interlock

el. contact: IP20 splash water secured

unlocking device in the sill (triangle socket)

pieces stainless steel or electrogalvanize

attachment directly at the steel frame

load: DW 900 / DH 2100 approx. 175kg

options:

revision front apron height

revision upper door frame width

el. Contact shaft and cardoor : IP67


special attachment on customer's request

covering behind area stainless steel

door leaf stainless steel

edge protector (0,8mm stainless steel)

special door frame

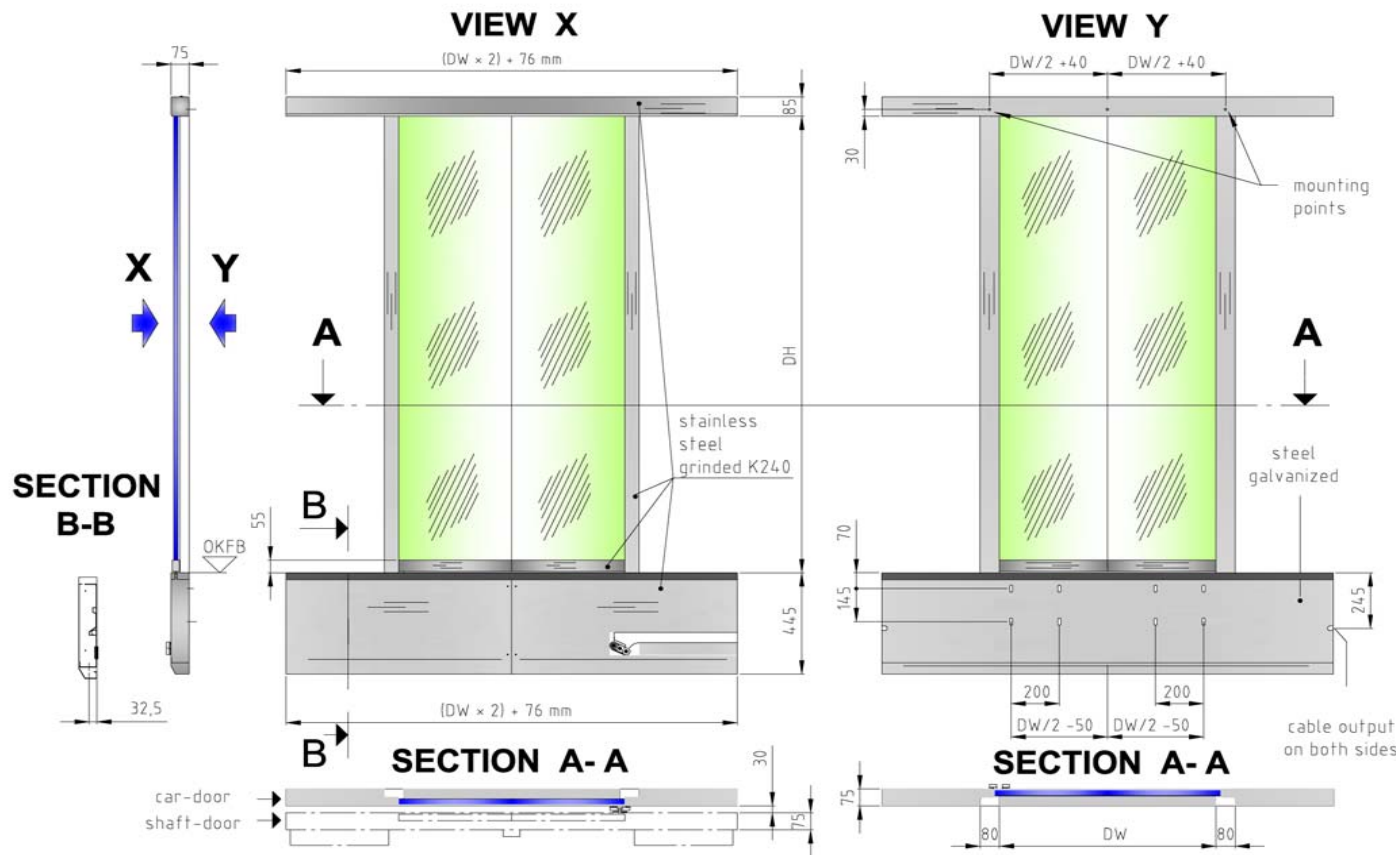

specification for GBH glass car door **RSZ-S1**, door drive underneath

technical description
cabin door:

DW 800 --1400mm, DH 2000 - 3000mm
 mechanism underneath
 full glass door, VSG16 (bracket below)
 drive Siemens AT40
 el. contact: IP67
 pieces stainless steel or electrogalvanize
 attachment directly at the cabine
 load: DW 900 / DH 2100 approx. 240kg

options:

door leaf stainless steel
 revision front apron high
 revision upper door frame width
 Sonderbefestigung kundenspezifisch
 special attachment on customer's request
 light curtain with stainless steel bracket
 electromagnetic door-interlock
 type Kronenberg
 by distance car-shaft >150mm
 edge protector (0,8mm stainless steel)
 covering behind area stainless steel

General remarks

